



Super HC[®] Belts


Pioneered by Gates, these "narrow" cross-sections can transmit up to three times the horsepower of the classical cross-sections (A, B, C, and D) in the same amount of drive space.

Markets/Applications

Suitable for all industrial applications, particularly where space, weight and horsepower capacity are critical.

Features/Advantages

- **Gates Curves** provide proper cord support and full contact with the sheave-groove for uniform loading, uniform wear, and increased belt life.
- **Flex-Bonded Cords** are strongly bonded to the body of the belt resulting in equal load distribution and the absorption of bending stress without cord deterioration.
- **The Flex-Weave[®] Cover** is a patented construction for longer cover life, providing extended protection to the core of the belt from oil, dirt, and heat.
- Meets RMA **oil and heat resistant** standards.
- Meets RMA **static conductivity** requirements.

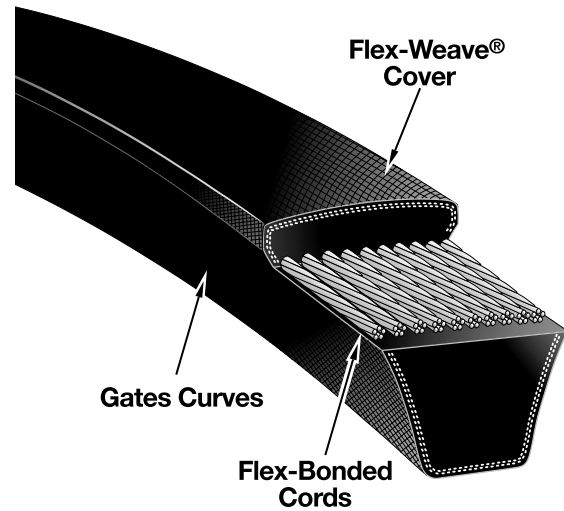

Recommended Sheaves
Super HC Sheaves

Notes


Gates Super HC belts are available in 3V, 5V, and 8V cross-sections.

HEAVY DUTY V-BELTS

Product No. Series 9332

3V Section

Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
3V250	9332-0250	25.0	.12	10
3V265	9332-0265	26.5	.12	10
3V280	9332-0280	28.0	.13	10
3V300	9332-0300	30.0	.14	10
3V315	9332-0315	31.5	.15	10
3V335	9332-0335	33.5	.16	10
3V355	9332-0355	35.5	.17	10
3V375	9332-0375	37.5	.17	10
3V400	9332-0400	40.0	.19	10
3V420	9332-0420	42.0	.20	150
3V425	9332-0425	42.5	.20	10
3V450	9332-0450	45.0	.21	10
3V475	9332-0475	47.5	.22	10
3V500	9332-0500	50.0	.24	10
3V530	9332-0530	53.0	.25	10
3V560	9332-0560	56.0	.26	10
3V590	9332-0590	59.0	.25	50
3V600	9332-0600	60.0	.28	10
3V630	9332-0630	63.0	.30	10




Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
3V650	9332-0650	65.0	.31	100
3V670	9332-0670	67.0	.32	10
3V710	9332-0710	71.0	.62	10
3V730	9332-0730	73.0	.34	10
3V750	9332-0750	75.0	.35	10
3V800	9332-0800	80.0	.38	10
3V810	9332-0810	81.0	.38	76
3V830	9332-0830	83.0	.39	10
3V850	9332-0850	85.0	.40	10
3V900	9332-0900	90.0	.43	10
3V950	9332-0950	95.0	.45	10
3V1000	9332-1000	100.0	.47	10
3V1060	9332-1060	106.0	.50	10
3V1120	9332-1120	112.0	.53	10
3V1180	9332-1180	118.0	.56	10
3V1250	9332-1250	125.0	.59	10
3V1320	9332-1320	132.0	.62	10
3V1400	9332-1400	140.0	.66	10

Product No. Series 9334

5V Section

Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
5V500	9334-0500	50.0	.65	10
5V530	9334-0530	53.0	.73	10
5V560	9334-0560	56.0	.77	10



Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
5V600	9334-0600	60.0	.80	10
5V630	9334-0630	63.0	.82	10
5V670	9334-0670	67.0	.89	10





Super HC® Belts


Product No. Series 9334 (continued)

5V Section (continued)

Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
5V710	9334-0710	71.0	.93	10
5V750	9334-0750	75.0	1.00	10
5V800	9334-0800	80.0	1.05	10
5V850	9334-0850	85.0	1.10	10
5V900	9334-0900	90.0	1.20	10
5V950	9334-0950	95.0	1.25	10
5V1000	9334-1000	100.0	1.32	10
5V1060	9334-1060	106.0	1.40	10
5V1120	9334-1120	112.0	1.50	10
5V1180	9334-1180	118.0	1.55	10
5V1250	9334-1250	125.0	1.64	10
5V1320	9334-1320	132.0	1.74	10
5V1400	9334-1400	140.0	1.82	10
5V1500	9334-1500	150.0	2.00	10
5V1600	9334-1600	160.0	2.10	10
5V1630	9334-1630	163.0	2.15	26

Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
5V1700	9334-1700	170.0	2.25	10
5V1710	9334-1710	171.0	2.25	26
5V1800	9334-1800	180.0	2.35	10
5V1900	9334-1900	190.0	2.50	10
5V2000	9334-2000	200.0	2.60	10
5V2120	9334-2120	212.0	2.80	10
5V2240	9334-2240	224.0	2.95	10
5V2360	9334-2360	236.0	3.10	10
5V2500	9334-2500	250.0	3.30	10
5V2650	9334-2650	265.0	3.50	5
5V2800	9334-2800	280.0	3.70	5
5V3000	9334-3000	300.0	3.98	5
5V3150	9334-3150	315.0	4.20	5
5V3350	9334-3350	335.0	4.40	5
5V3550	9334-3550	355.0	4.70	5

HEAVY DUTY V-BELTS



Product No. Series 9336

8V Section

Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
8V1000	9336-1000	100.0	3.30	5
8V1060	9336-1060	106.0	3.55	5
8V1120	9336-1120	112.0	3.80	5
8V1180	9336-1180	118.0	4.00	5
8V1250	9336-1250	125.0	4.10	5
8V1320	9336-1320	132.0	4.45	5
8V1400	9336-1400	140.0	4.75	5
8V1500	9336-1500	150.0	5.15	5
8V1600	9336-1600	160.0	5.45	5
8V1700	9336-1700	170.0	5.85	5
8V1800	9336-1800	180.0	6.15	5
8V1900	9336-1900	190.0	6.40	4
8V2000	9336-2000	200.0	6.90	4
8V2120	9336-2120	212.0	7.35	4
8V2240	9336-2240	224.0	7.50	4
8V2300	9336-2300	230.0	7.85	4

Size	Product No.	Belt O.C. (In.)	Wt. Ea. (Lbs.)	Qty Per Ctn
8V2360	9336-2360	236.0	7.95	3
8V2500	9336-2500	250.0	8.50	3
8V2650	9336-2650	265.0	9.00	3
8V2800	9336-2800	280.0	9.45	3
8V3000	9336-3000	300.0	10.45	3
8V3150	9336-3150	315.0	10.85	3
8V3350	9336-3350	335.0	11.40	1
8V3550	9336-3550	355.0	12.15	1
8V3750	9336-3750	375.0	12.90	1
8V4000	9336-4000	400.0	13.70	1
8V4250	9336-4250	425.0	14.65	1
8V4500	9336-4500	450.0	15.40	1
8V4750	9336-4750	475.0	16.29	1
8V5000	9336-5000	500.0	17.10	1
8V5600	9336-5600	560.0	19.10	1
8V6000	9336-6000	600.0	20.50	1

